



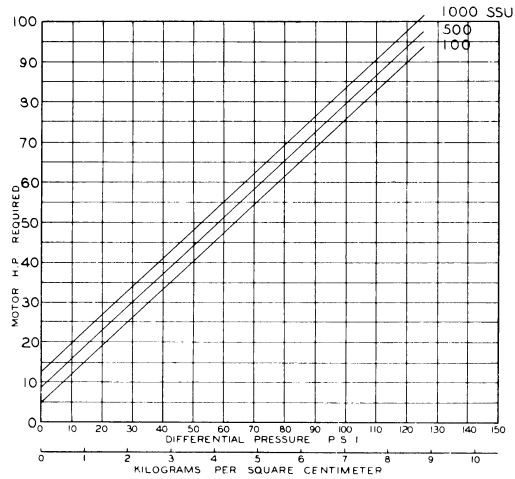



CHARACTERISTIC CURVES
Models: HXL8, HXLJ8

Page Number	102-023
Effective	Oct 2001
Replaces	102/27 Feb 88
Section	102



350 RPM

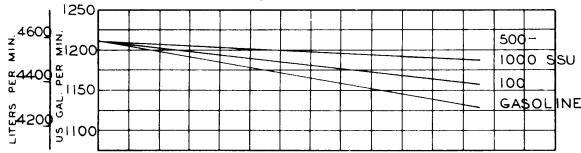



300 RPM

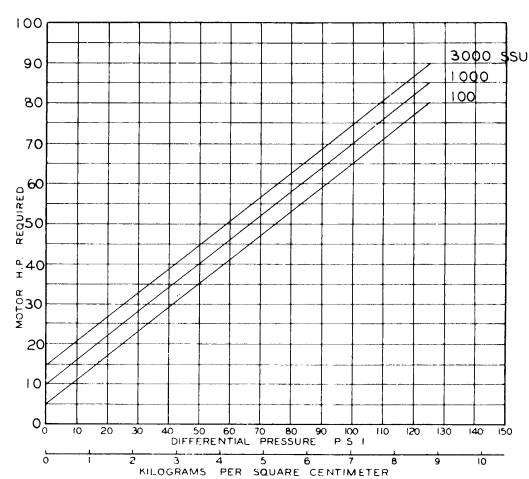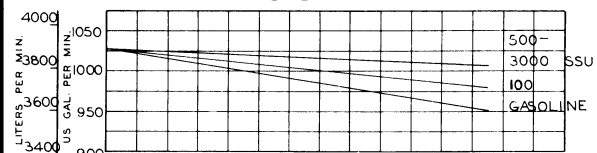

280 RPM

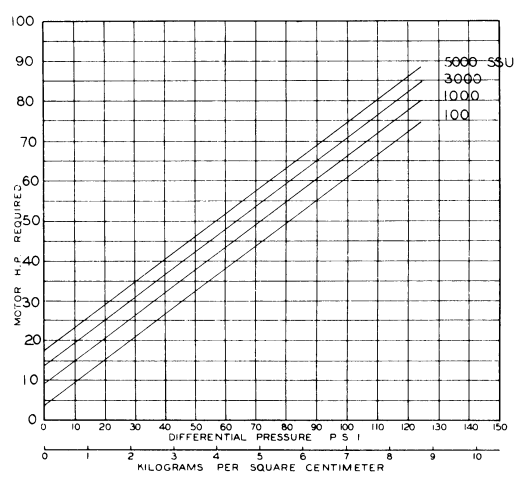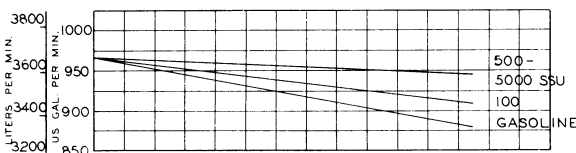

230 RPM

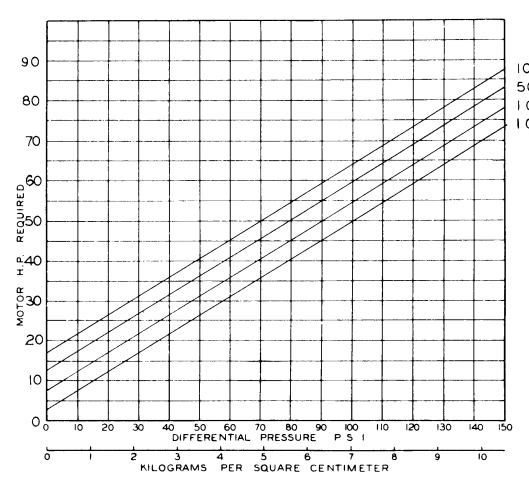
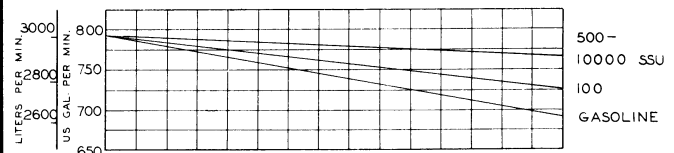


Actual capacities are dependent upon the vapor pressure of the liquid, the suction lift and the inlet line losses of the system. Blackmer characteristic curves are normally based upon a inlet condition of 5" to 8" Hg. vacuum and zero liquid vapor pressure.



CHARACTERISTIC CURVES

Models: HXL8, HXLJ8



190 RPM

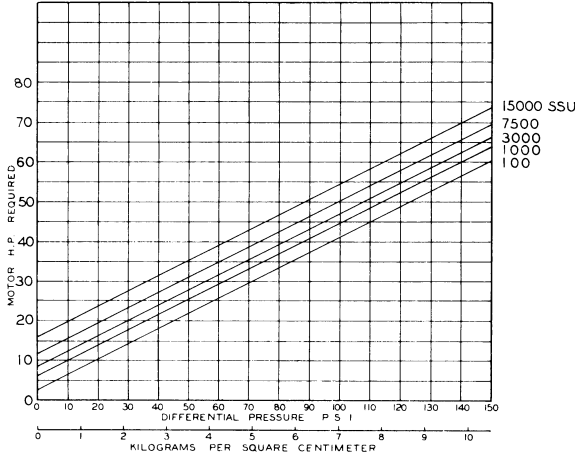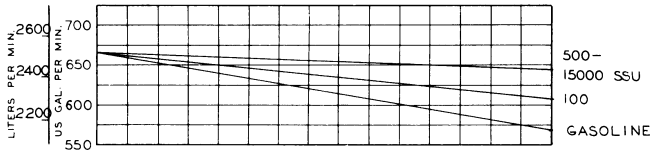



155 RPM

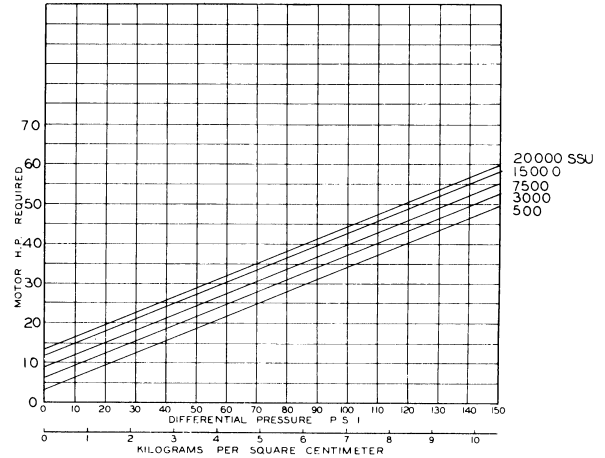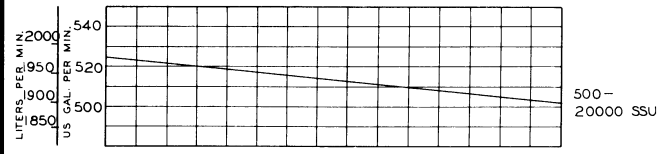

125 RPM

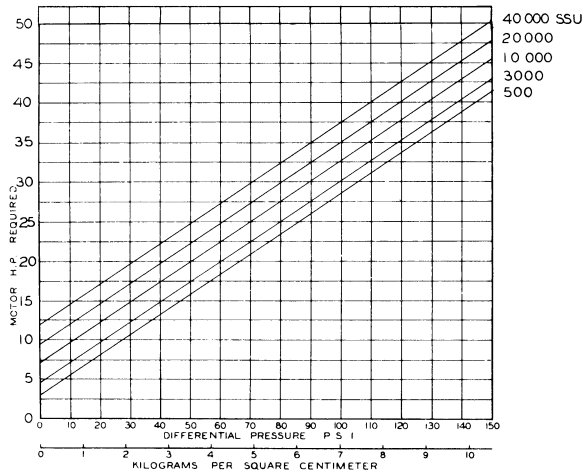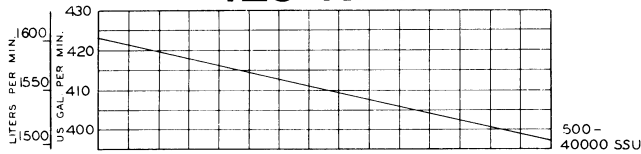

100 RPM

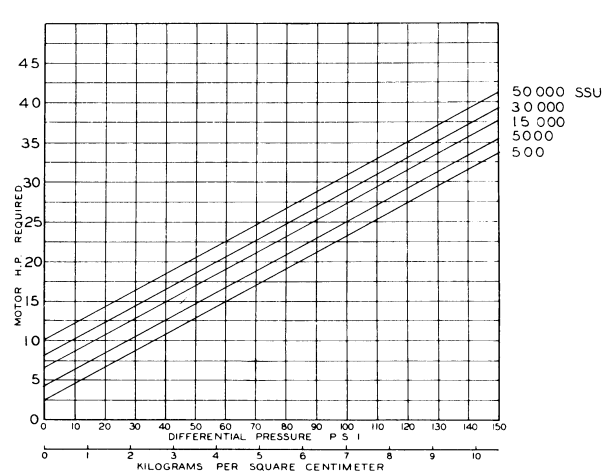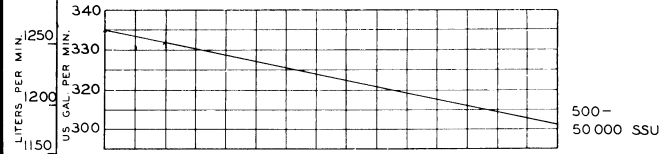



Actual capacities are dependent upon the vapor pressure of the liquid, the suction lift and the inlet line losses of the system. Blackmer characteristic curves are normally based upon a inlet condition of 5" to 8" Hg. vacuum and zero liquid vapor pressure.





CHARACTERISTIC CURVES

Models: HXL8, HXLJ8

84 RPM

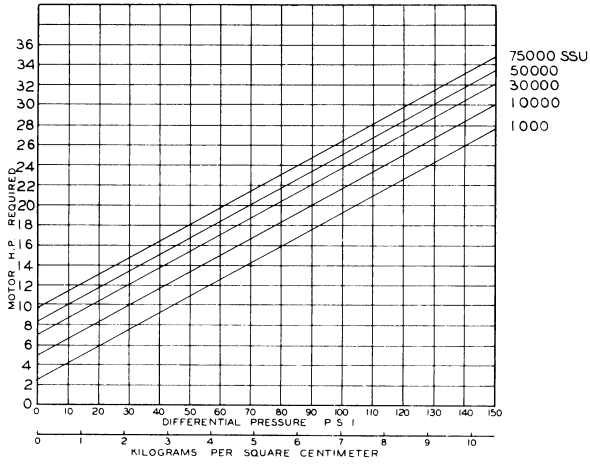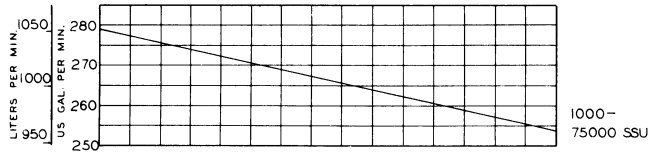

68 RPM

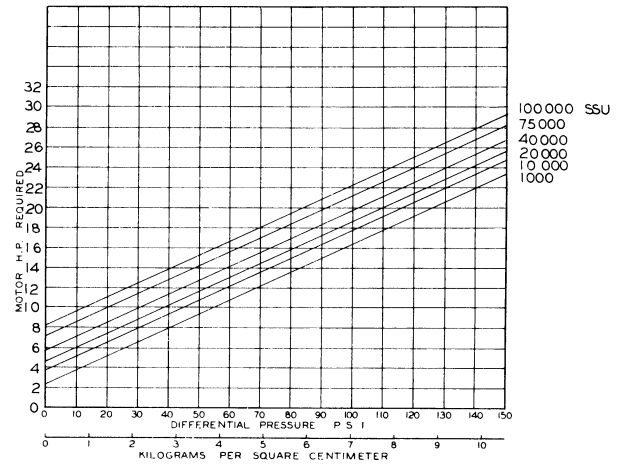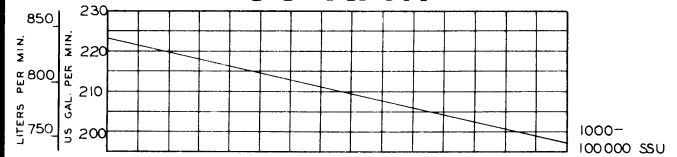

Actual capacities are dependent upon the vapor pressure of the liquid, the suction lift and the inlet line losses of the system. Blackmer characteristic curves are normally based upon a inlet condition of 5" to 8" Hg. vacuum and zero liquid vapor pressure.

