





CHARACTERISTIC CURVES
Model: XLW2

Page Number	105-027
Effective	Nov 2007
Replaces	Oct 2001
Section	105


350 RPM

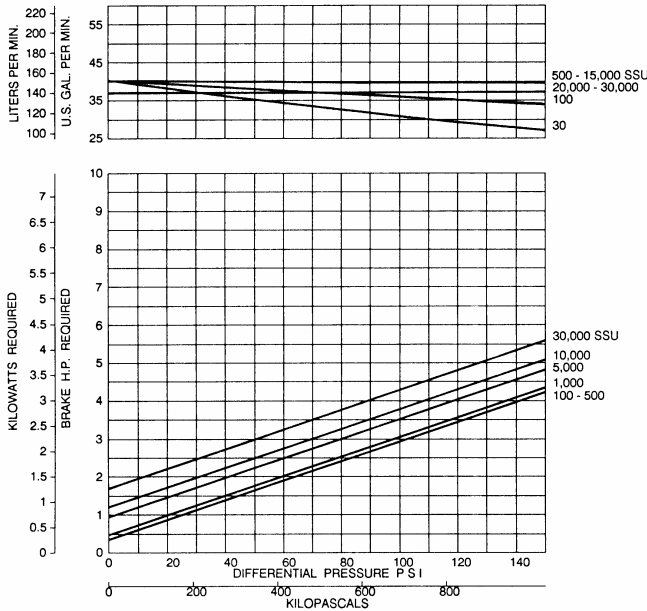


280 RPM

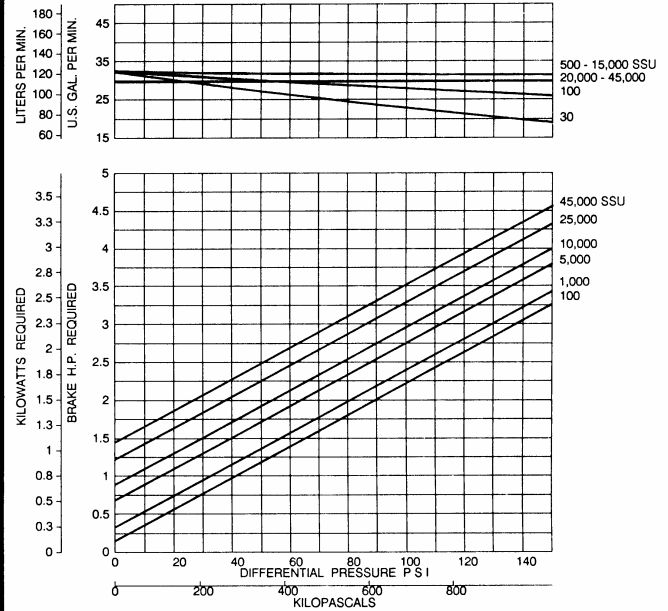

230 RPM

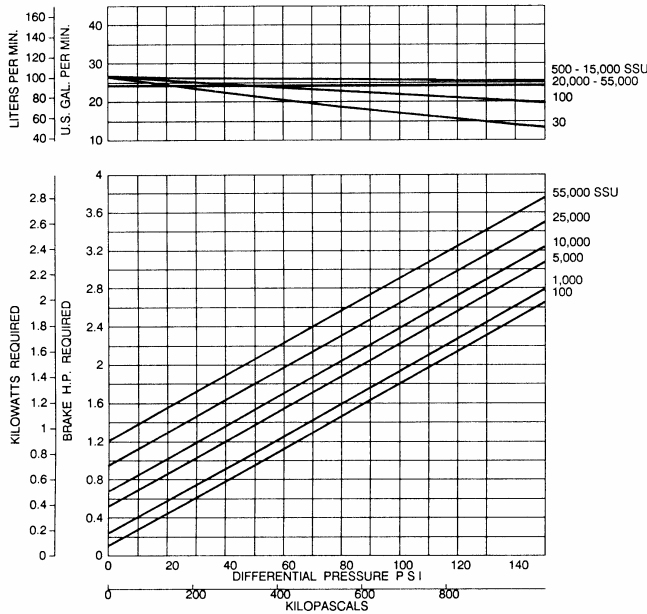

190 RPM

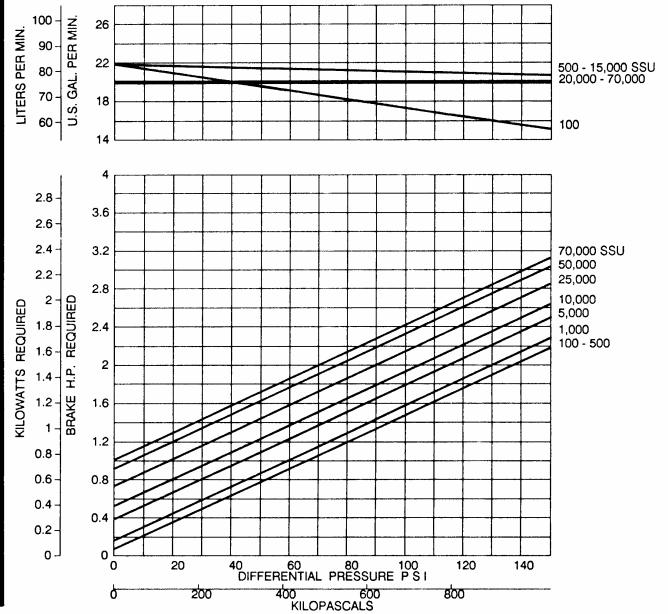

NOTE: Maximum fluid viscosity for the XLW pump models is 75,000 SSU (15,750 Cs).


NOTE: Blackmer Characteristic Curves are based on Brake Horsepower (bhp). To determine Motor Horsepower, drive train inefficiencies must be added to the bhp.

Actual capacities are dependent upon the vapor pressure of the liquid and the inlet conditions of the system.


CHARACTERISTIC CURVES

Models: XLW2


155 RPM

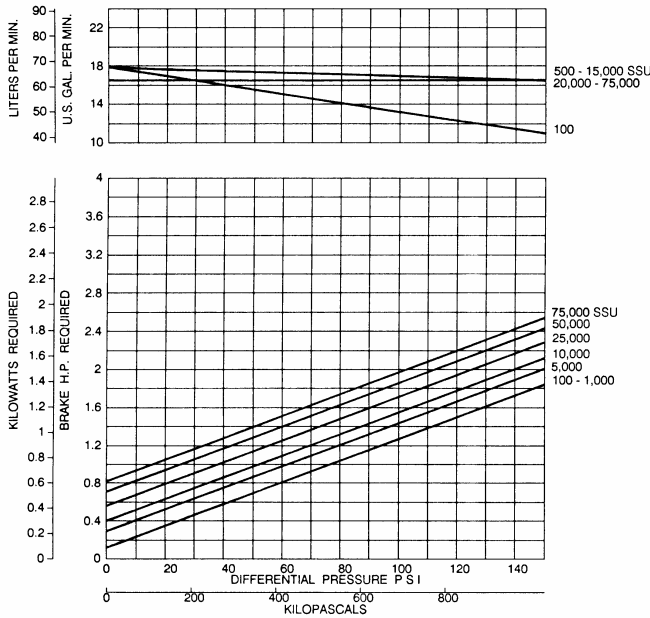


125 RPM

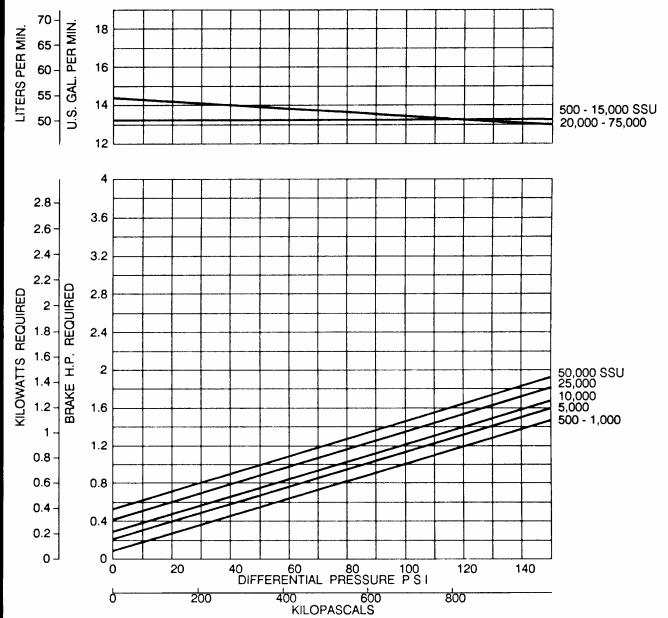

84 RPM

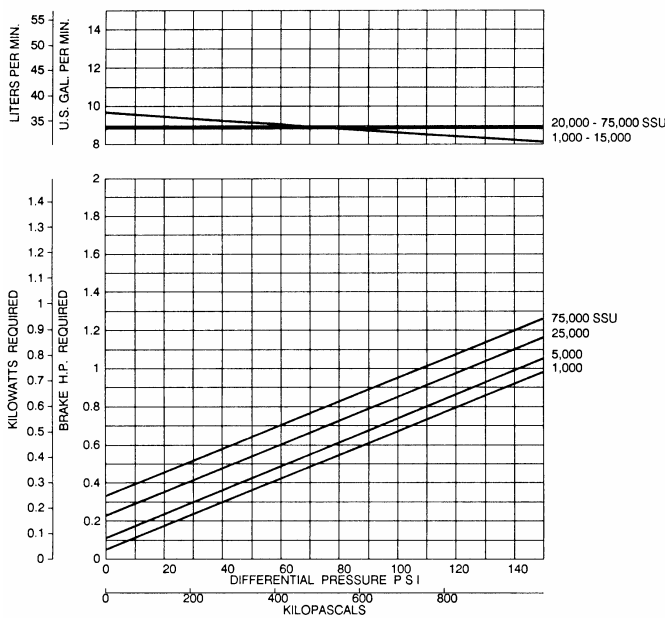

56 RPM

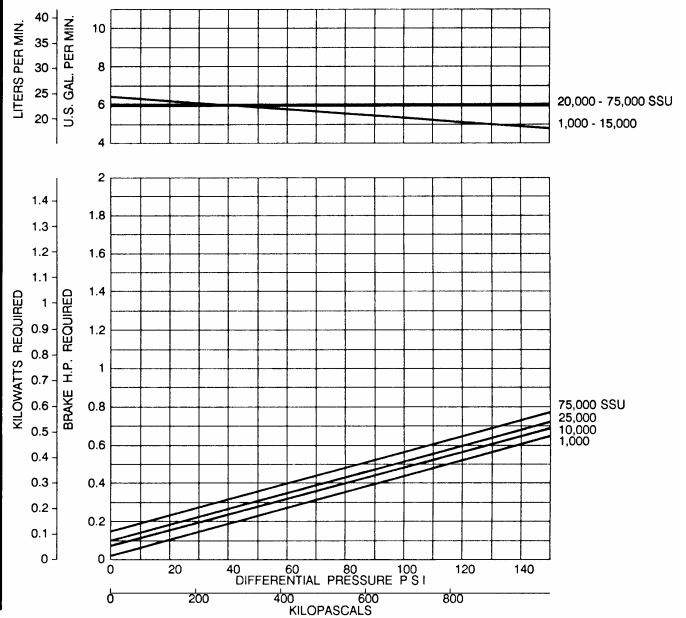

NOTE: Maximum fluid viscosity for the XLW pump models is 75,000 SSU (15,750 Cs).

NOTE: Blackmer Characteristic Curves are based on Brake Horsepower (bhp). To determine Motor Horsepower, drive train inefficiencies must be added to the bhp.

Actual capacities are dependent upon the vapor pressure of the liquid and the inlet conditions of the system.

