





CHARACTERISTIC CURVES
Model: SMVP200B

Page Number	108-039
Effective	Sept 2007
Replaces	July 2002
Section	108

1 CP (30 SSU)*

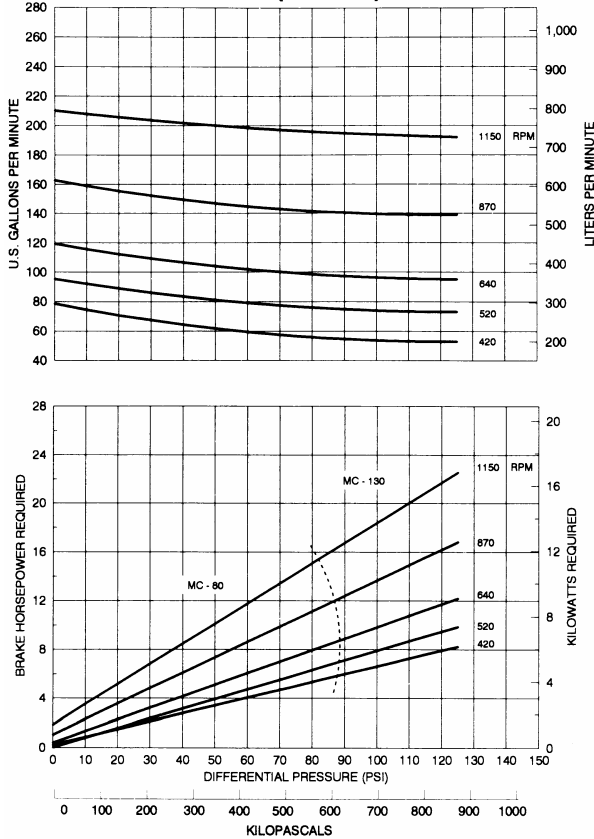

20 CP (100 SSU)*

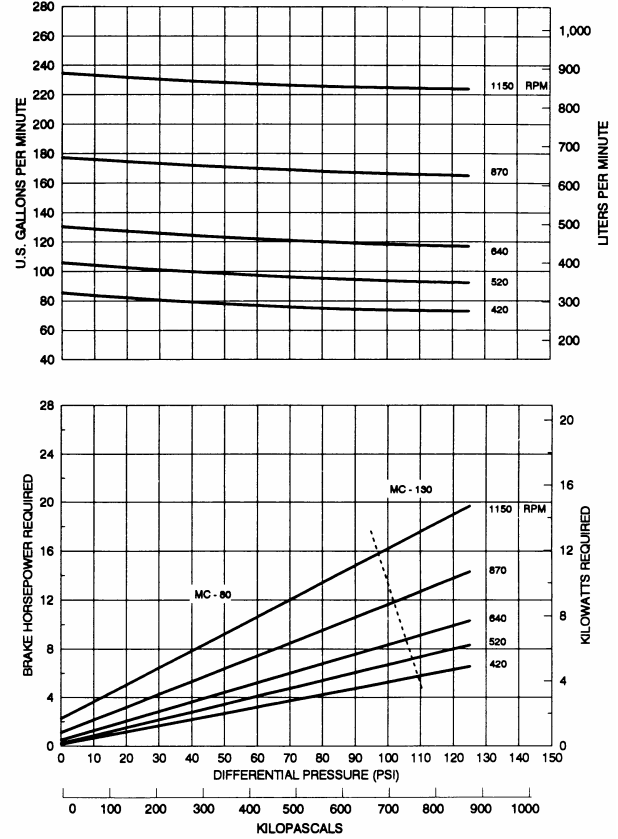

NOTE: The MC (dotted) lines are provided to assist in magnetic coupling selection. The MC lines can be used for operating temperatures up to 200°F (93°C). For higher temperatures, consult factory.



Blackmer Characteristic Curves are based on Brake Horsepower (BHp). To determine Motor Horsepower, drive train inefficiencies must be added to the BHp.

Actual capacities are dependent upon the vapor pressure of the liquid and the inlet conditions of the system.

*Centipoise (CP) to SSU conversion is based on a specific gravity of 1.0.

CHARACTERISTIC CURVES

Model: SMVP200B

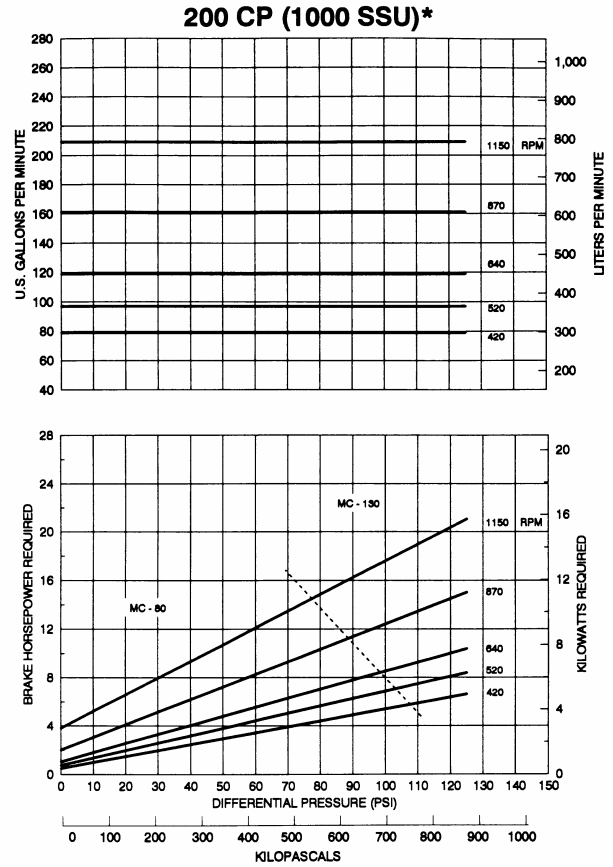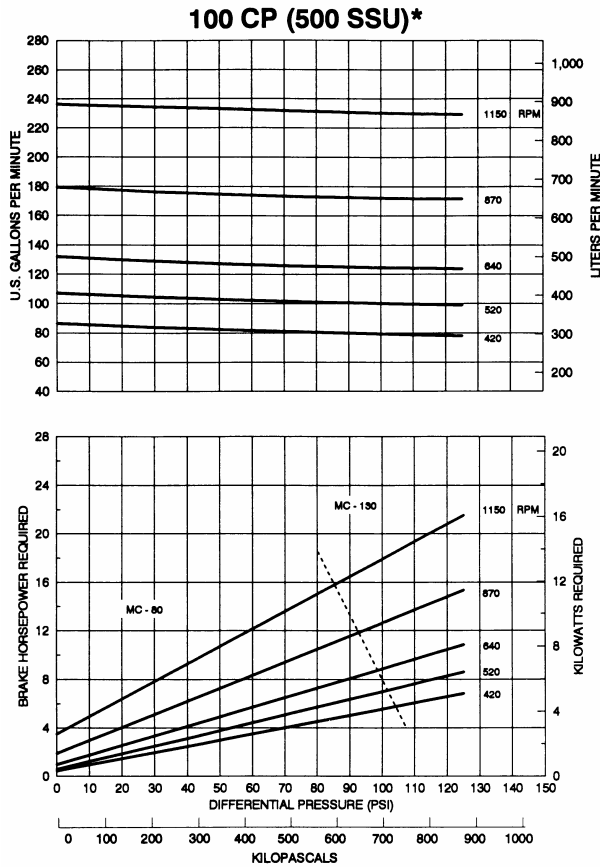

NOTE: The MC (dotted) lines are provided to assist in magnetic coupling selection. The MC lines can be used for operating temperatures up to 200°F (93°C). For higher temperatures, consult factory.

Blackmer Characteristic Curves are based on Brake Horsepower (BHp). To determine Motor Horsepower, drive train inefficiencies must be added to the BHp.



Actual capacities are dependent upon the vapor pressure of the liquid and the inlet conditions of the system.

*Centipoise (CP) to SSU conversion is based on a specific gravity of 1.0.



CHARACTERISTIC CURVES

Model: SMVP200B

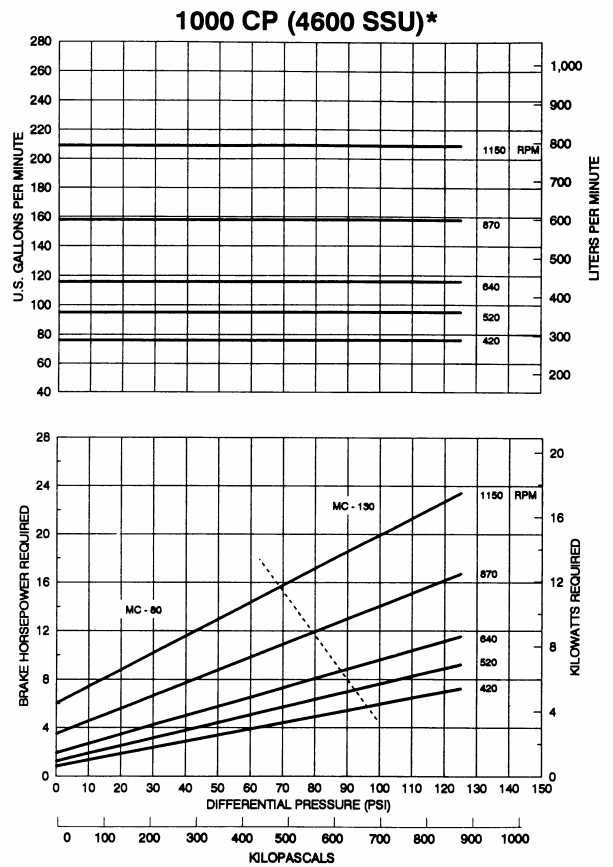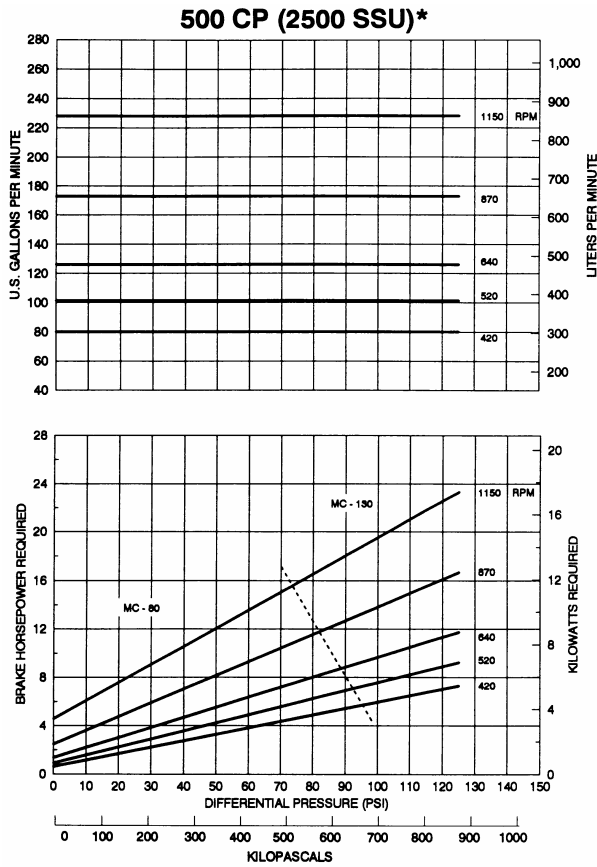

NOTE: The MC (dotted) lines are provided to assist in magnetic coupling selection. The MC lines can be used for operating temperatures up to 200°F (93°C). For higher temperatures, consult factory.

Blackmer Characteristic Curves are based on Brake Horsepower (BHp). To determine Motor Horsepower, drive train inefficiencies must be added to the BHp.



Actual capacities are dependent upon the vapor pressure of the liquid and the inlet conditions of the system.

*Centipoise (CP) to SSU conversion is based on a specific gravity of 1.0.



CHARACTERISTIC CURVES

Model: SMVP200B

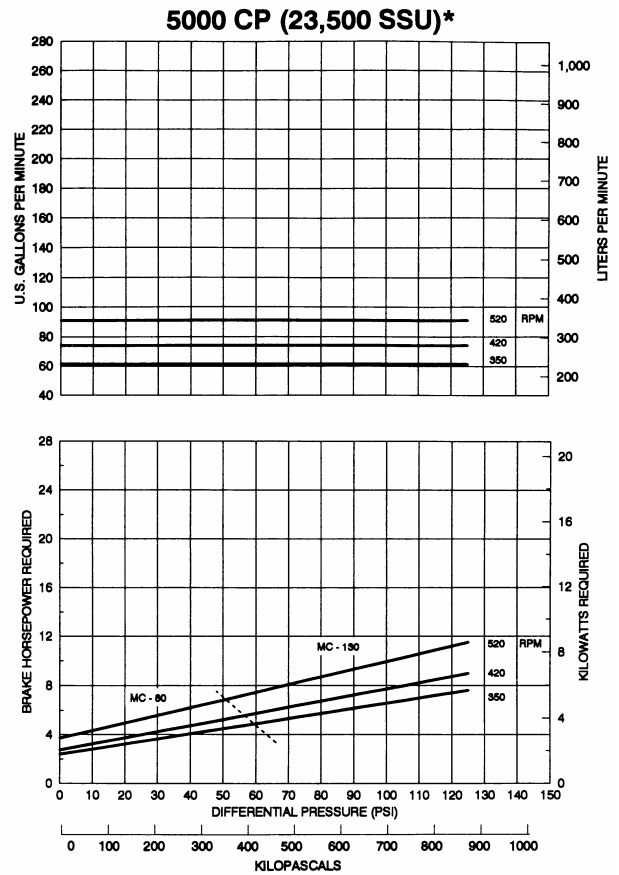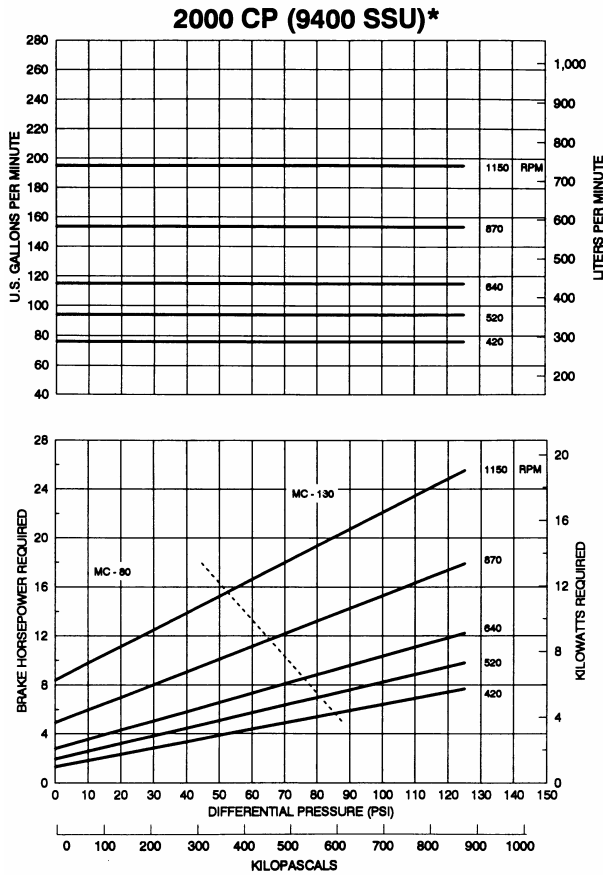

NOTE: The MC (dotted) lines are provided to assist in magnetic coupling selection. The MC lines can be used for operating temperatures up to 200°F (93°C). For higher temperatures, consult factory.

Blackmer Characteristic Curves are based on Brake Horsepower (BHp). To determine Motor Horsepower, drive train inefficiencies must be added to the BHp.

Actual capacities are dependent upon the vapor pressure of the liquid and the inlet conditions of the system.

*Centipoise (CP) to SSU conversion is based on a specific gravity of 1.0.

