



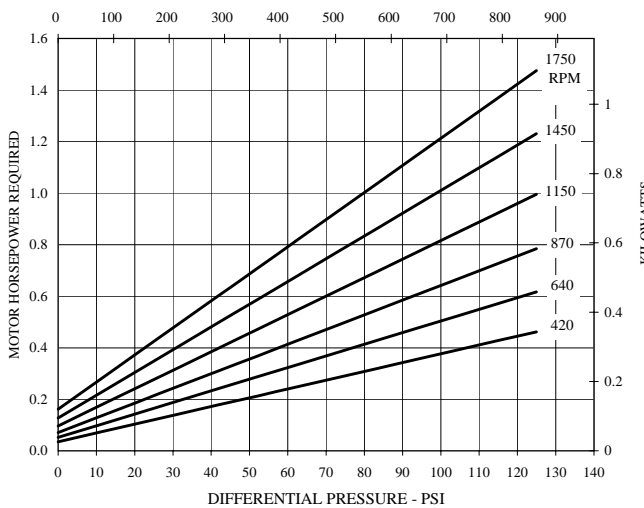



CHARACTERISTIC CURVES  
ProVane Models: PV10, PVS10

Page Number	111-025
Effective	Feb 2005
Replaces	New
Section	111

Viscosity: 30 SSU (1cP)

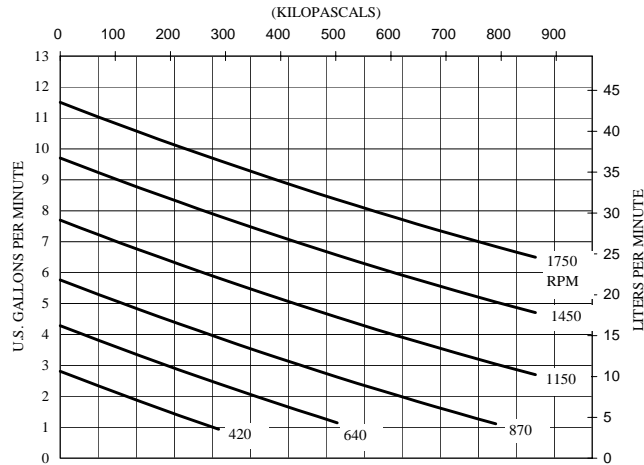

Viscosity: 100 SSU (20cP)

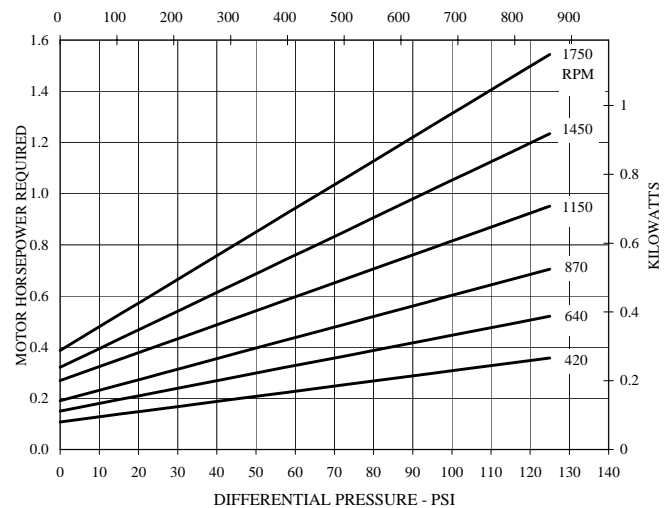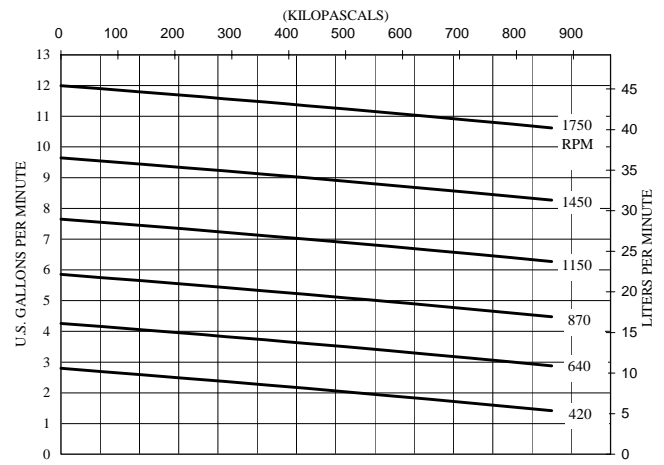

Motor speeds listed are nominal. Actual pump speed and performance may vary depending on conditions



Blackmer Characteristic Curves are based on Brake Horsepower (BHp). To determine Motor Horsepower, drive train inefficiencies must be added to the BHp.

Centipoise (cP) to SSU conversion is based on a fluid specific gravity of 1.0.



# CHARACTERISTIC CURVES

## ProVane Models: PV10, PVS10

Viscosity: 225 SSU (48cP)

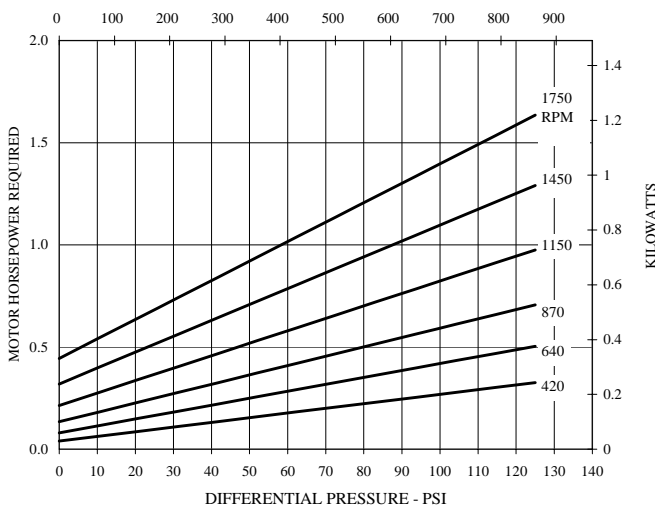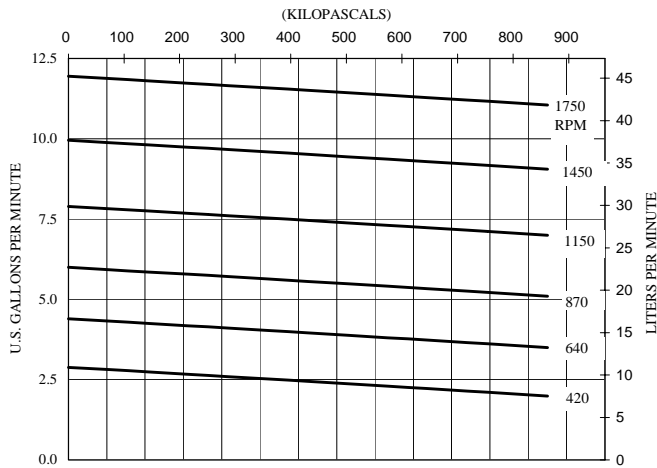

Viscosity: 500 SSU (110cP)

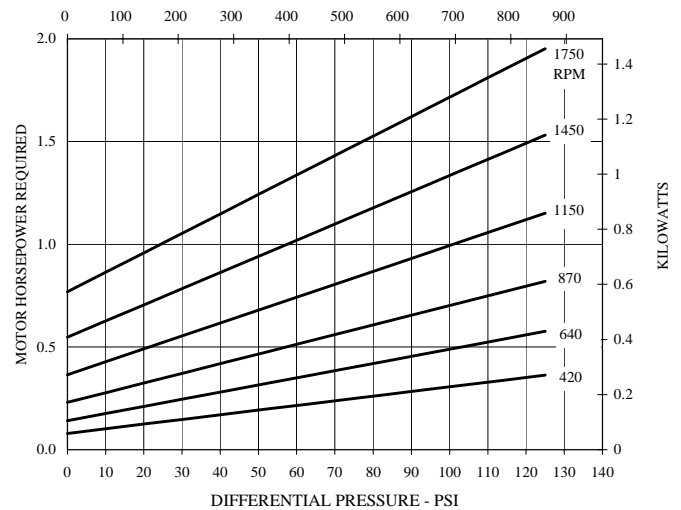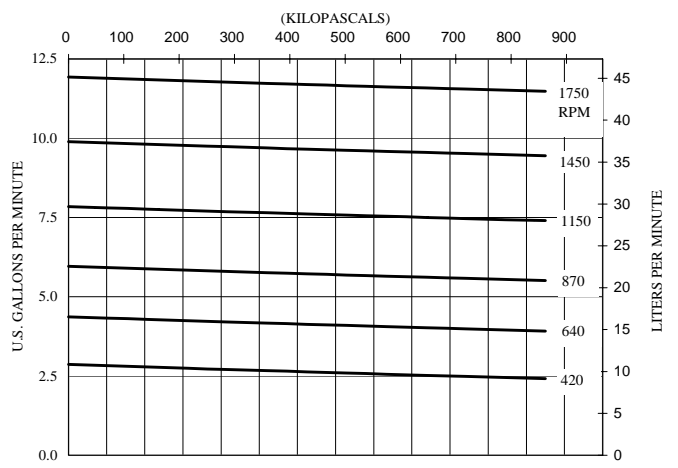

Motor speeds listed are nominal. Actual pump speed and performance may vary depending on conditions


Blackmer Characteristic Curves are based on Brake Horsepower (BHp). To determine Motor Horsepower, drive train inefficiencies must be added to the BHp.

Centipoise (cP) to SSU conversion is based on a fluid specific gravity of 1.0.



# CHARACTERISTIC CURVES

ProVane Models: PV10, PVS10

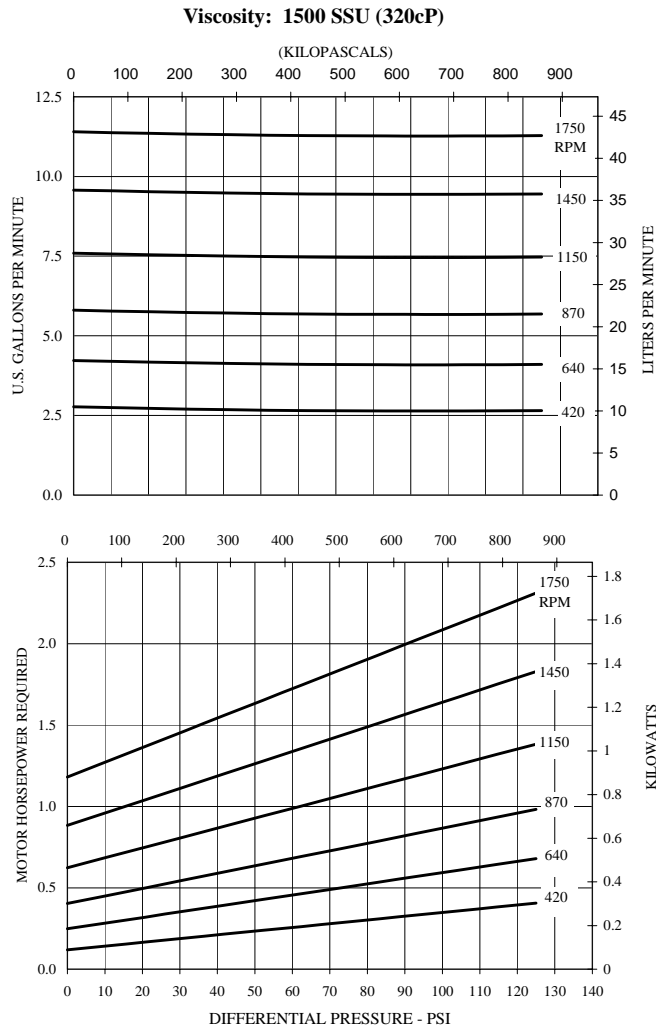

Motor speeds listed are nominal. Actual pump speed and performance may vary depending on conditions

Blackmer Characteristic Curves are based on Brake Horsepower (BHp). To determine Motor Horsepower, drive train inefficiencies must be added to the BHp.

Centipoise (cP) to SSU conversion is based on a fluid specific gravity of 1.0.

