





CHARACTERISTIC CURVES
Models: XRL1.25, XRLF1.25

Page Number	107-021
Effective	Dec 2007
Replaces	Oct 2001
Section	107


1750 RPM

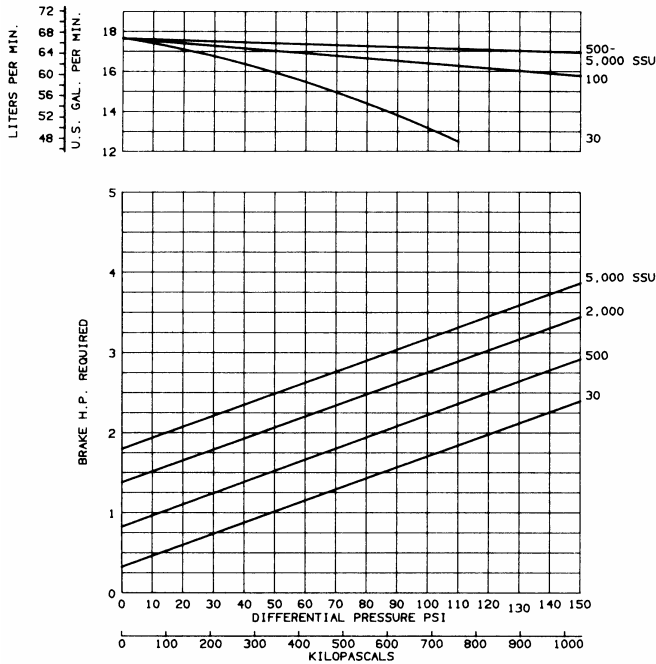


1450 RPM

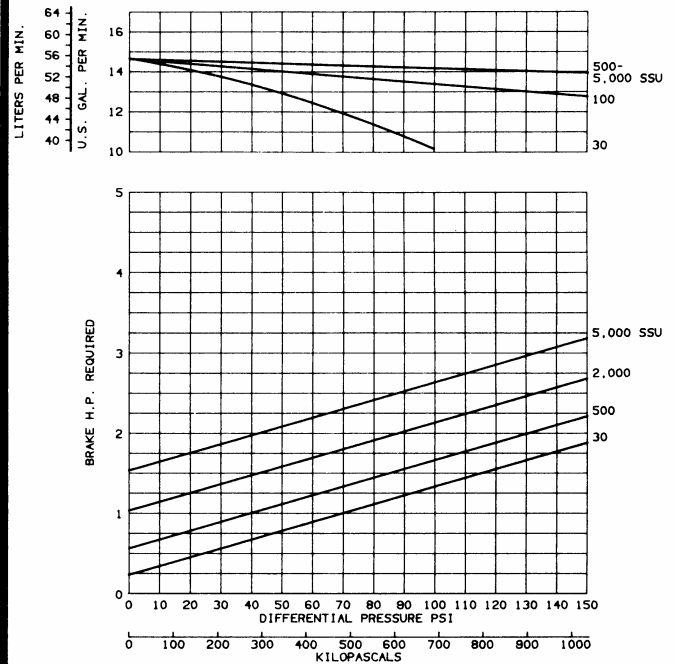

1150 RPM

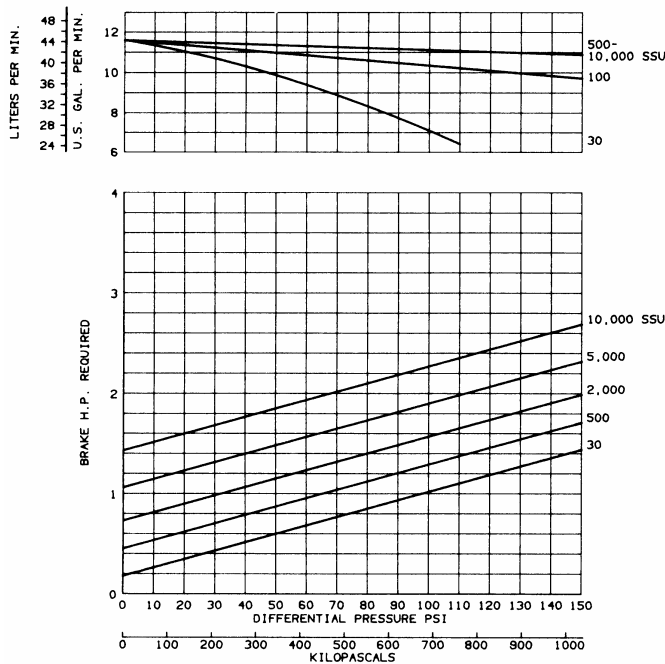

950 RPM

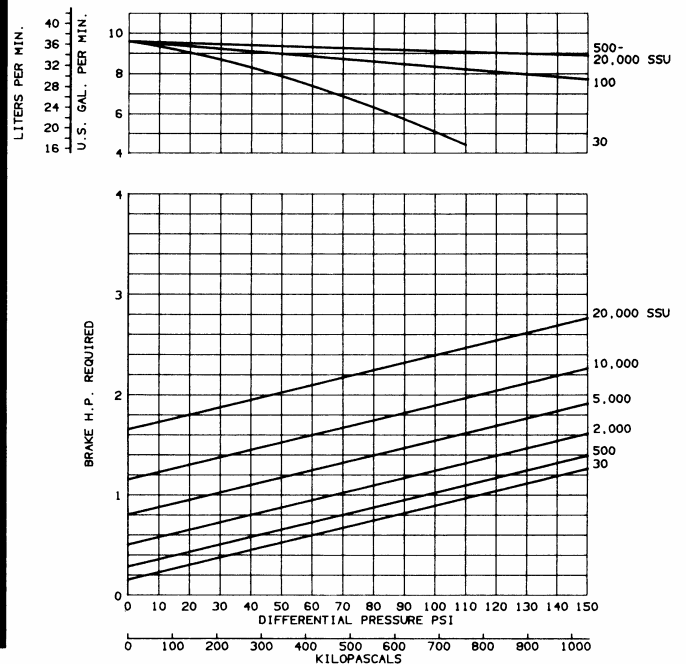


NOTE: Blackmer Characteristic Curves are based on Brake Horsepower (bhp). To determine Motor Horsepower, drive train inefficiencies must be added to the bhp.


Actual capacities are dependent upon the vapor pressure of the liquid and the inlet conditions of the system.

CHARACTERISTIC CURVES
Models: XRL1.25, XRLF1.25


870 RPM

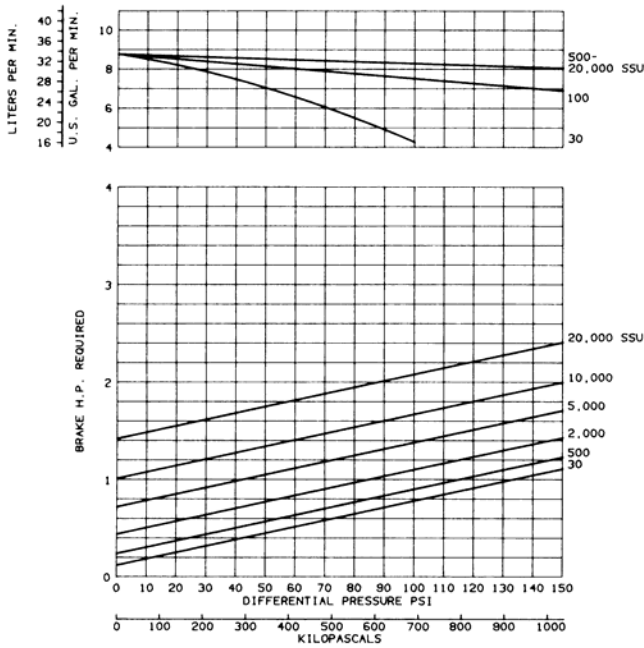


640 RPM

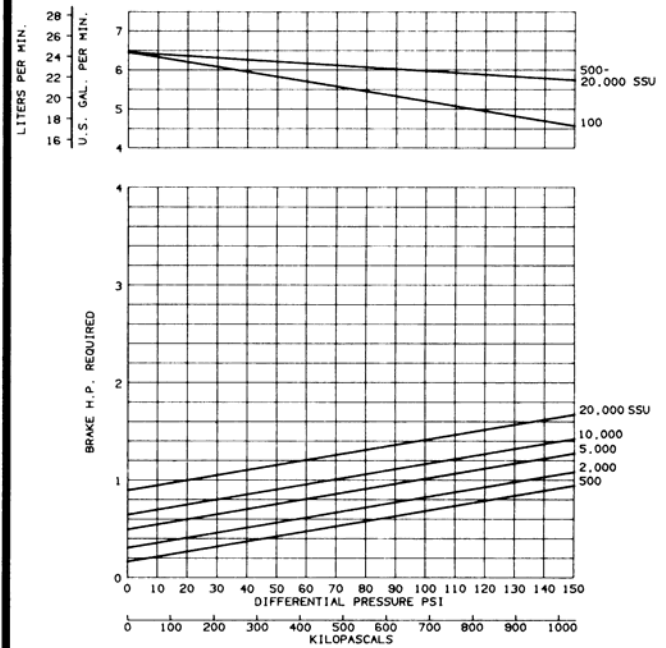

520 RPM

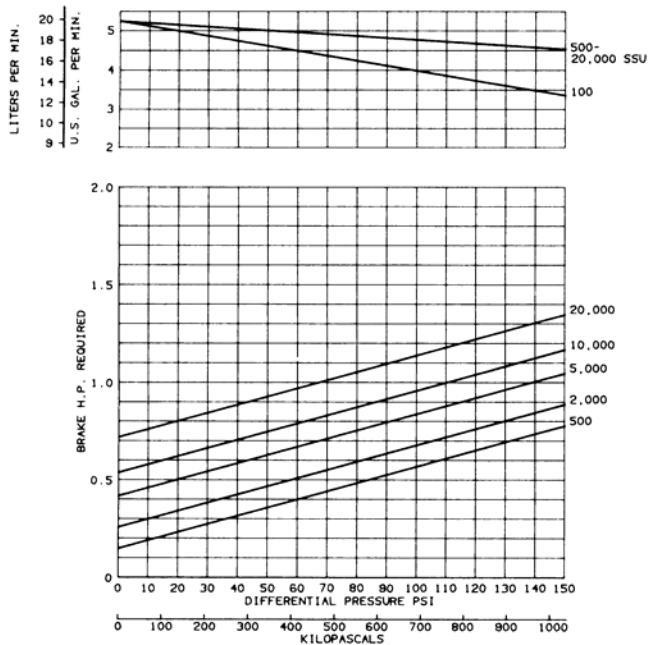

420 RPM

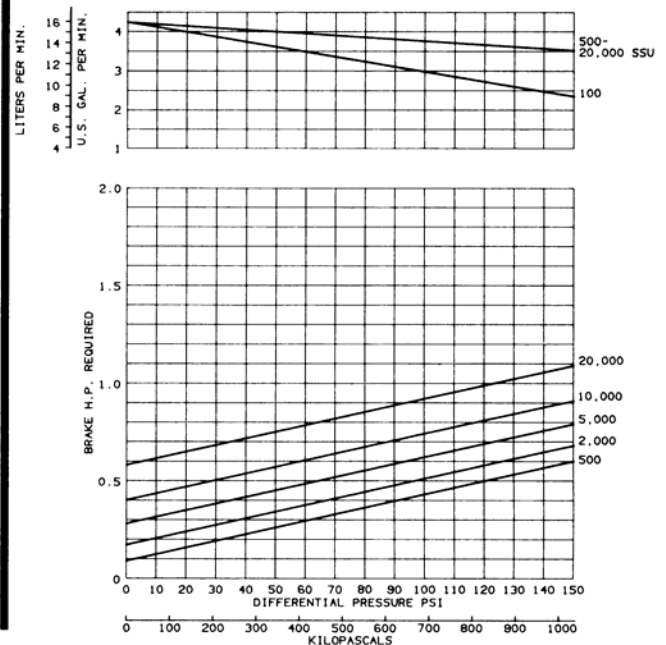


NOTE: Blackmer Characteristic Curves are based on Brake Horsepower (bhp). To determine Motor Horsepower, drive train inefficiencies must be added to the bhp.

Actual capacities are dependent upon the vapor pressure of the liquid and the inlet conditions of the system.




CHARACTERISTIC CURVES
Models: XRL1.25, XRLF1.25


300 RPM

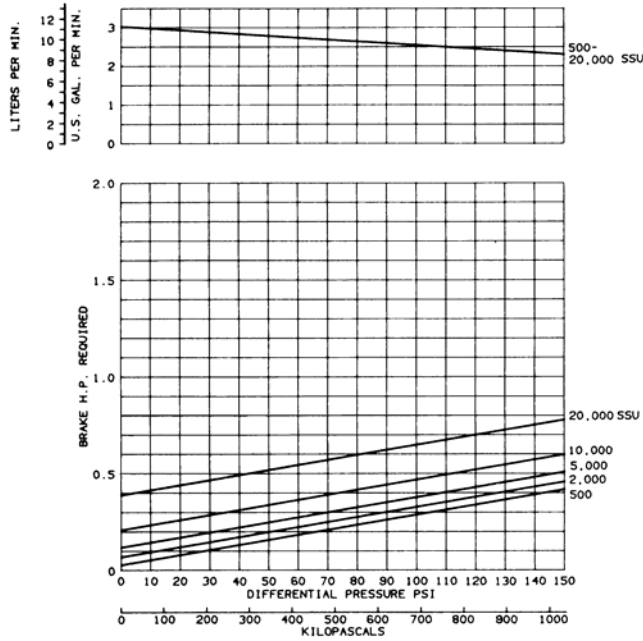

200 RPM

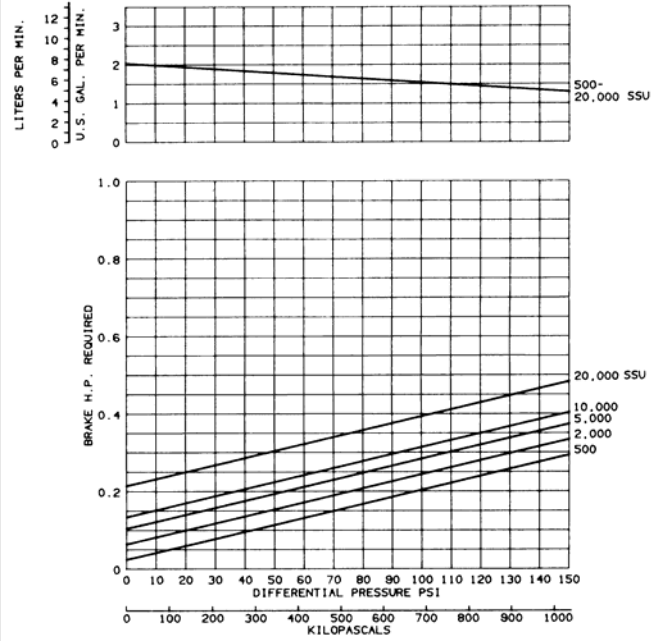

100 RPM

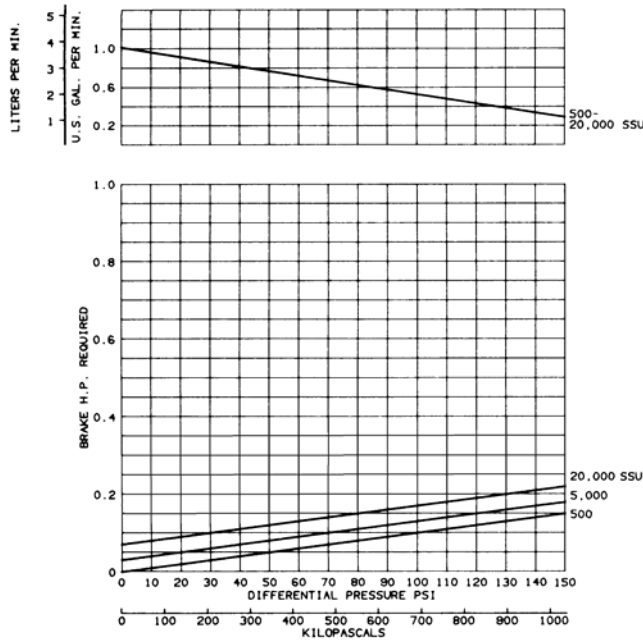

NOTE: Blackmer Characteristic Curves are based on Brake Horsepower (bhp). To determine Motor Horsepower, drive train inefficiencies must be added to the bhp.

Actual capacities are dependent upon the vapor pressure of the liquid and the inlet conditions of the system.

